

OPERATING INSTRUCTIONS



~~PARTS EVALUATION LABORATORY~~

~~MANUAL NUMBER 210~~

~~IF LOANED PLEASE RETURN TO ABOVE LAB.~~

TYPE 1201-C

UNIT REGULATED POWER SUPPLY

E N E R A L R A D I O C O M P A N Y

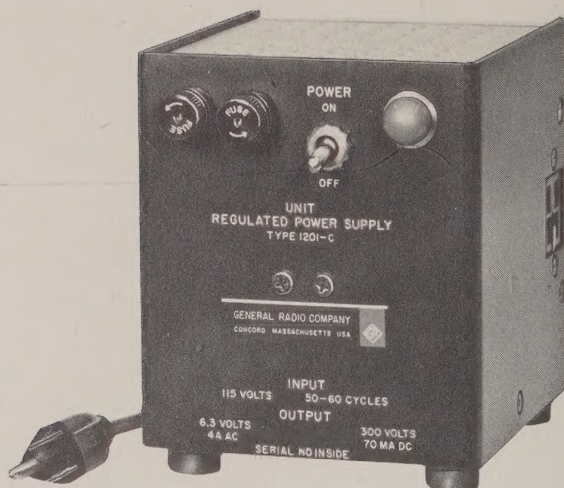


Figure 1-1. Panel view of the Type 1201-C Unit Regulated Power Supply. The Type 1201-CQ18 is identical in appearance except for type number and input data silk-screening.

SPECIFICATIONS

Input: Type 1201-C – 105 to 125 volts; Type 1201-CQ18 – 195 to 235 volts or 210 to 250 volts; 50 to 60 cps, 90 watts full load nominal line voltage. Also can be operated from 400-cycle supply if 400-cycle, 6.3 volt output can be tolerated.

Output: 300 volts dc regulated at 70 milliamperes maximum; 6.3 volts ac unregulated at 4 amperes maximum.

Regulation: $\pm 0.25\%$ with maximum line and load variations combined.

Ripple: Less than 1 millivolt, rms, 120 cps, at full load.

Connectors: Three-wire cord permanently attached. Standard 4-terminal receptacle mounted on cabinet side for convenient connection to Unit instruments.

Accessories Supplied: Mating plug for equipment other than Unit instruments.

Cabinet: Unit instrument.

Dimensions: Width 5, height $5\frac{1}{4}$, depth $6\frac{1}{4}$ inches (130 by 150 by 160 mm), over-all, not including power cord.

Net Weight: 6 pounds (2.8 kg).

Shipping Weight: 11 pounds (5 kg).

1. INTRODUCTION.

1.1 PURPOSE AND DESCRIPTION.

The Types 1201-C and 1201-CQ18 Unit Regulated Power Supplies (Figure 1-1) are designed to provide a source of regulated power for other Unit instruments. They can also supply instruments other than those of the Unit line by means of a mating connector provided.




Both power supplies provide 300 volts dc at a maximum of 70 milliamperes and 6.3 volts ac at a maximum of 4 amperes. They are recommended in applications that require low ripple voltage and constant input voltage.

2. OPERATING PROCEDURE.

2.1 RELAY-RACK MOUNTING.

If desired, the Type 1201-C can be rack-mounted by use of the appropriate adaptor panel as listed in Table 2-1. The panels are finished in charcoal-gray crackle paint to match the instrument panel.

TABLE 2-1
RELAY-RACK ADAPTOR PANELS

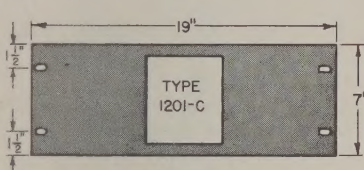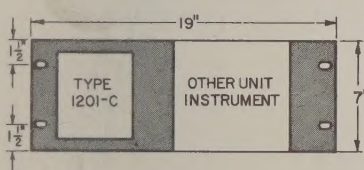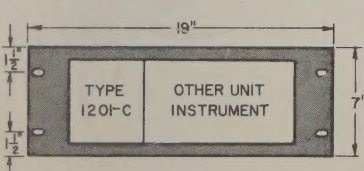Type	Description	Code Number
480-P4U1  The diagram shows a rectangular panel with a width of 19 inches and a height of 7 inches. On the left side, there are two vertical dimensions of 1 1/2 inches each, indicating the spacing of mounting holes. A central rectangular area is labeled 'TYPE 1201-C'.	Relay-Rack Adaptor Panel used to rackmount the Type 1201-C alone.	0480-9984
480-P4UCS1  The diagram shows a rectangular panel with a width of 19 inches and a height of 7 inches. On the left side, there are two vertical dimensions of 1 1/2 inches each. The panel is divided into two main sections: the left section is labeled 'TYPE 1201-C' and the right section is labeled 'OTHER UNIT INSTRUMENT'.	Relay-Rack Adaptor Panel used to rackmount the Type 1201-C with a Type 1208-C, 1209-C, 1209-CL, 1211-C, 1215-C, or 1361-A.	
480-P4U3  The diagram shows a rectangular panel with a width of 19 inches and a height of 7 inches. On the left side, there are two vertical dimensions of 1 1/2 inches each. The panel is divided into two main sections: the left section is labeled 'TYPE 1201-C' and the right section is labeled 'OTHER UNIT INSTRUMENT'.	Relay-Rack Adaptor Panel used to rackmount the Type 1201-C with a Type 1206-B, 1210-C, 1212-A, 1213-D, 1217-C, or 1220-A.	0480-9986

2.2 AC-LINE CONNECTIONS.

The Type 1201-C is wired to operate from an ac line of 105 to 125 volts. The Type 1201-CQ18 is normally wired to operate from an ac line of 195 to 235 volts but it can be changed to operate from 210 to 250 volts as follows (see Figure 2-1):

- a. Locate the three connections to the primary of the power transformer, T1 (all three are on the front of the transformer, toward the outside edge).
- b. For 210 to 250-volt operation, move the red lead from the lower primary tab to the upper one.

2.3 INTERUNIT CONNECTIONS.

If the power supply is to be used with a Unit instrument, plug the Unit instrument into the four-terminal connector (SO1, shown in Figure 2-2) on the right-hand side of the power supply.

If the power supply is to be used with equipment other than Unit instruments, use the mating connector provided. Terminal numbers are shown in Figure 2-2 and are also marked on the socket.

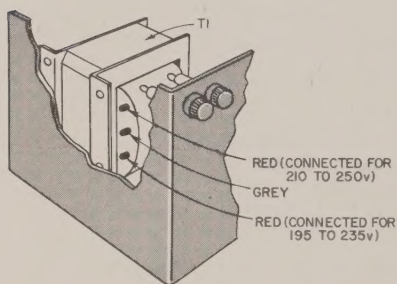


Figure 2-1. To change ac line requirements of Type 1201-CQ18, interchange red wire on power transformer.




Figure 2-2. Power output connector. Both the 6.3-volt ac and the 300-volt dc supplies are isolated from ground to give greater latitude in external connections.

3. PRINCIPLES OF OPERATION.

3.1 GENERAL.

A full-wave voltage doubler with silicon rectifiers provides the input voltage for the series regulator. The output voltage, through a voltage divider, is compared with a zener reference diode by means of a cascode amplifier. The amplified error voltage controls the series regulator tube to provide constant output voltage. An additional feedback loop, comprising R533, R538, and R531, reduces the effects of input fluctuations.

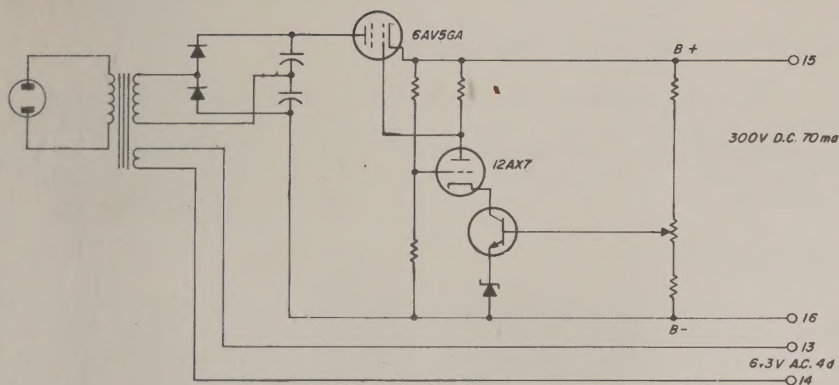


Figure 3-1. Elementary schematic diagram of the Type 1201-C and Type 1201-CQ18 Unit Regulated Power Supplies.

4. SERVICE AND MAINTENANCE.

4.1 WARRANTY.

We warrant that each new instrument sold by us is free from defects in material and workmanship, and that, properly used, it will perform in full accordance with applicable specifications for a period of two years after original shipment. Any instrument or component that is found within the two-year period not to meet these standards after examination by our factory, sales engineering office, or authorized repair agency personnel, will be repaired or, at our option, replaced without charge, except for tubes or batteries that have given normal service.

4.2 SERVICE.

The two-year warranty stated above attests the quality of materials and workmanship in our products. When difficulties do occur, our service engineers will assist in any way possible. If the difficulty cannot be eliminated by use of the following service instructions, please write or phone our Service Department (see rear cover), giving full information of the trouble and of steps taken to remedy it. Be sure to mention the serial and type numbers of the instrument.

Before returning an instrument to General Radio for service, please write to our Service Department or nearest sales engineering office, requesting a Returned Material Tag. Use of this tag will ensure proper handling and identification. For instruments not covered by the warranty, a purchase order should be forwarded to avoid unnecessary delay.

4.3 OUTPUT VOLTAGE ADJUSTMENT.

A single adjustment, R542 (Figure 4-1), is provided to set the output voltage to 300 volts $\pm 1\%$. Readjustment of this potentiometer is usually unnecessary, except after replacement of CR534 (type IN758A zener diode). Adjust R542 so that an accurate voltmeter indicates 300 volts at the output terminals.

4.4 FUSES.

The Type 1201-C Unit Regulated Power Supply uses 0.8-ampere fuses. When the power supply is used with Unit instruments, full output power is not required and the input current is below 0.8 ampere. However, if both output voltages are fully loaded and the power supply is run on a 125-volt line, the input current is just over 0.8 amperes and the fuses may blow after several hours. Therefore, substitute 1-ampere fuses for continuous operation at high line voltage and full load.

The Type 1201-CQ18 Unit Regulated Power Supply uses 0.5 ampere fuses which are satisfactory for all normal line and load conditions.

4.5 COVER REMOVAL.

To remove the cover, loosen the thumbscrew on the left-hand side of the cabinet and slide the cover off, away from the panel.

4.6 ETCHED-BOARD REMOVAL.

While it is possible to replace all tubes and measure all voltages without removal of the etched board, access to components requires swinging the etched board out of the instrument. Remove V531 (6AV5GA) and the two screws at the rear of the etched board (see Figure 4-1). The board will now swing out on the hinges provided. If V531 is replaced, the instrument may be operated in this position.

4.7 TROUBLE-SHOOTING NOTES.


All voltages are measured with nominal ac line voltage unless noted otherwise (i.e., 115, 215, or 230 volts; refer to paragraph 2.2 for additional details).

4.7.1 INCORRECT OUTPUT VOLTAGE.

If the output voltage is regulated and within a few volts of 300, reset R542 (refer to paragraph 4.3). If this adjustment drifts, replace R540, R541, R542, or CR534.

If the output voltage drops only at low line and full load, replace V531 (6AV5GA) and check the voltage across C1 and C2. The voltage from the positive terminal of C2 to the negative terminal of C1 should be 430 volts with full load and nominal line voltage. If this voltage is less than 420 volts, check CR532, CR533, C1, and C2.

Figure 4-2. Schematic diagram of the Type 1201-C and Type 1201-CQ18 Unit Regulated Power Supplies.

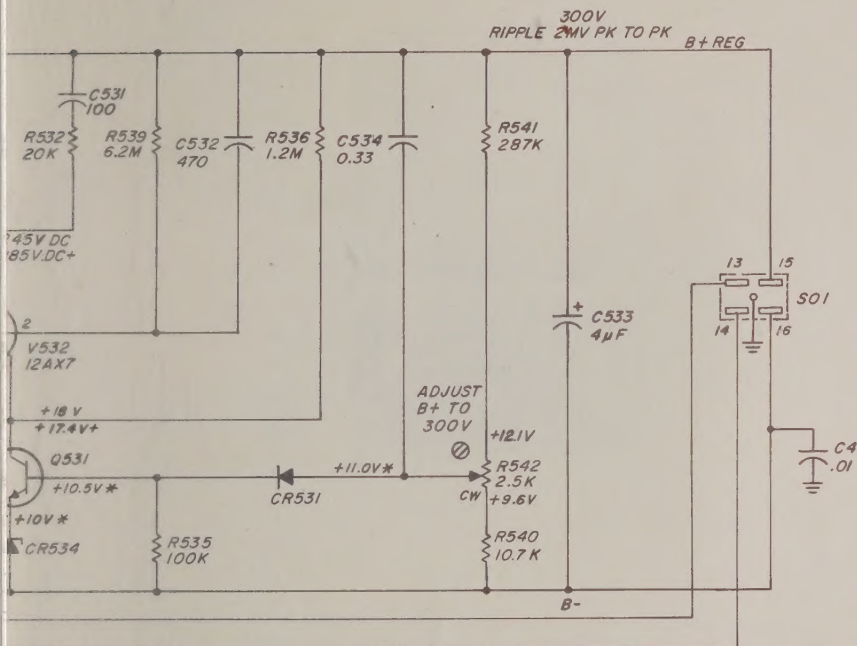

Ref No.	Description	Part No.
R1	RESISTOR, Wire-wound, 6.8 Ω ±10%	part of 7510-1930
R531	RESISTOR, Composition, 1 kΩ ±5% 1/2w	6100-2105
R532	RESISTOR, Composition, 20 kΩ ±5% 1/2w	6100-3205
R533	RESISTOR, Composition, 100 kΩ ±5% 1/2w	6100-4105
R534	RESISTOR, Composition, 100 kΩ ±5% 1/2w	6100-4105
R535	RESISTOR, Composition, 100 kΩ ±5% 1/2w	6100-4105
R536	RESISTOR, Composition, 1.2 MΩ ±5% 1/2w	6100-5125
R537	RESISTOR, Composition, 2.7 MΩ ±5% 1/2w	6100-5275
R538	RESISTOR, Composition, 6.2 MΩ ±5% 1/2w	6100-5625
R539	RESISTOR, Composition, 6.2 MΩ ±5% 1/2w	6100-5625
R540	RESISTOR, Metal film, 10.7 kΩ ±1% 1/2w	6450-2107
R541	RESISTOR, Metal film, 287 kΩ ±1% 1/2w	6450-3287
R542	RESISTOR, Wire-wound, 2.5 kΩ ±10%	6050-1500
S1	SWITCH, dpst, POWER	7910-1300
SO1	SOCKET, Receptable, four-terminal	4230-0700
T1	TRANSFORMER, for Type 1201-C TRANSFORMER, for Type 1201-CQ18	0485-4950 0485-4982
V531	TUBE, Type 6AV5-GA	8360-2390
V532	TUBE, Type 12AX7	8370-0900


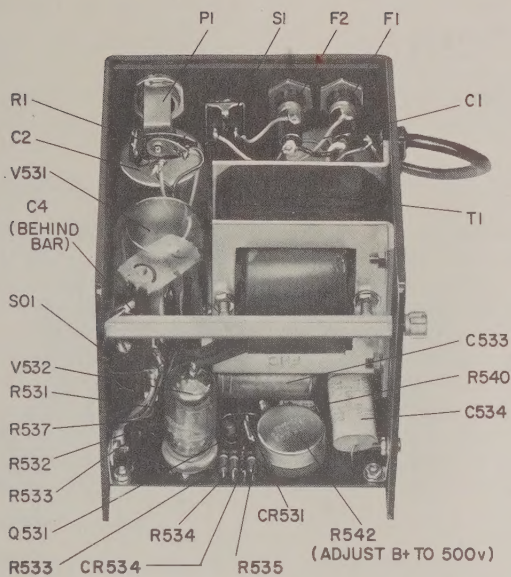


Figure 4-1. Interior view and etched-board layout.

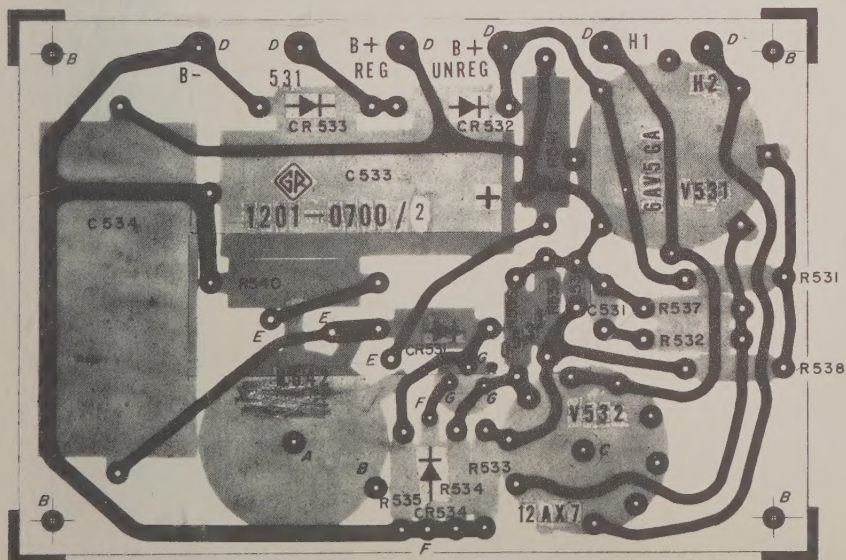

WEST CONCORD, MASSACHUSETTS,* 01781

617 369-4400

617 646-7400

SALES ENGINEERING OFFICES

METROPOLITAN NEW YORK*

Broad Avenue at Linden
Ridgefield, New Jersey, 07657
Telephone N.Y. 212 964-2722
N.J. 201 943-3140

SYRACUSE

Pickard Building
East Molloy Road
Syracuse, New York, 13211
Telephone 315 454-9323

PHILADELPHIA

1150 York Road
Abington, Pennsylvania, 19001
Telephone 215 887-8486
Phila., 215 424-7419

WASHINGTON* AND BALTIMORE

Rockville Pike at Wall Lane
Rockville, Maryland, 20852
Telephone 301 946-1600

ORLANDO

113 East Colonial Drive
Orlando, Florida, 32801
Telephone 305 425-4671

* Repair services are available
at these district offices.

CHICAGO*

6605 West North Avenue
Oak Park, Illinois, 60302
Telephone 312 848-9400

CLEVELAND

5579 Pearl Road
Cleveland, Ohio, 44129
Telephone 216 886-0150

LOS ANGELES*

1000 North Seward Street
Los Angeles, California, 90038
Telephone 213 469-6201

SAN FRANCISCO

1186 Los Altos Avenue
Los Altos, California, 94022
Telephone 415 948-8233

DALLAS

2501-A West Mockingbird Lane
Dallas, Texas, 75235
Telephone 214 Fleetwood 7-4031

TORONTO*

99 Floral Parkway
Toronto 15, Ontario, Canada
Telephone 416 247-2171

MONTREAL BRANCH

Office 395, 1255 Laird Boulevard
Town of Mount Royal, Quebec, Canada
Telephone 514 737-3673, -3674

General Radio Company (Overseas), Zurich, Switzerland
General Radio www.manualsplus.com End, Buckinghamshire, England
Overseas Countries



1022641

Printed in USA